


TSA 32 x 200



Technical data

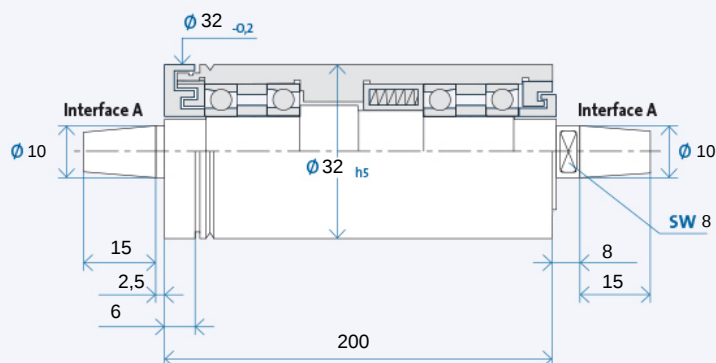

Maximum speed n_{max} [min⁻¹]* for bearing types:

Steel (steel) 40000



Hybrid (optional) x

* without tool

Ordering information: TSA 32 x 200 R is for clockwise, L for counter-clockwise


ROTATION (CW.)

ROTATION (CCW.)



Accessories

TSA Grinding wheel flanges

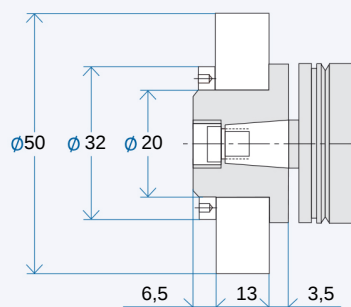

Ordering information flange: AX₁/X₂/X₃

X₁: Interface: 07/08/...

X₂: Flange style: MO/MS

X₃: Wheel:


K = Corundum grinding wheel

D = Diamond or CBN grinding wheel

Puller for flange: AX₁/X₂

Balancing quill for flange: AX₁

Pulleys



Interface	Dimensions [mm]		
	D	C	T
A 10	18	30	20
	50	30	20
	17	40	20
	20	40	20
	25	40	20
	63	40	20


Ordering information pulley: AX₁-X₂

X₁: Interface: 07/08/...

X₂: Figure from column D

Puller for pulley: AX₁/...

TSA Collet chuck



Interface	Dimensions [mm]				
	K	T	L	S	O
A 10	2	13,5	37	14	13,5
	3	13,5	37	14	13,5
	4	13,5	37	14	13,5
	4	13,5	37	14	13,5

Ordering information collet chuck: AX₁/X₂-(K)

X₁: Interface: 07/08/...

X₂: Housing diameter: 20/26/...

(K) = Inner diameter collet chuck

This data sheet reflects the state of information at the time of printing. Subject to technical changes. Information on possible options can be obtained from our catalogue which can be downloaded at www.gmn.de