



# Motor Spindle For External Grinding

### FEATURES



- Encoder
- Steel ball bearings
- Permanent grease lubrication
- Air purge
- Prepared for balancing system

### TECHNICAL DATA

Designation	Speed max. [rpm]	Output S1   S6-40% at ... [kW]		... Speed [rpm]	Torque S1   S6-40% up to ... [Nm]		... Speed [rpm]	Stiffness radial   axial [N/μm]	
		S1	S6-40%		S1	S6-40%		radial	axial
TSE 240g - 3000/20	3000	20	24	1500	129	156	1100	190	175

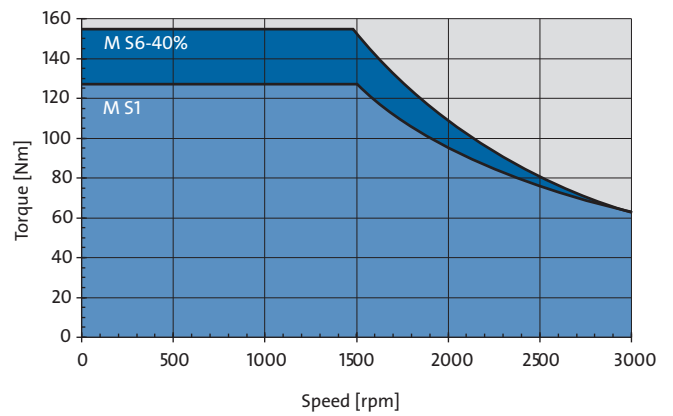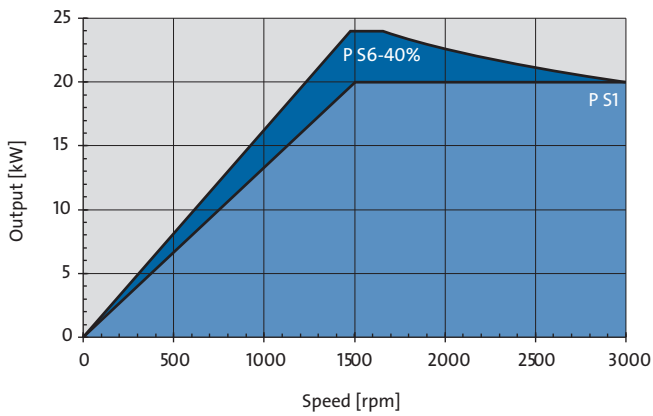

### DIMENSIONS [MM]

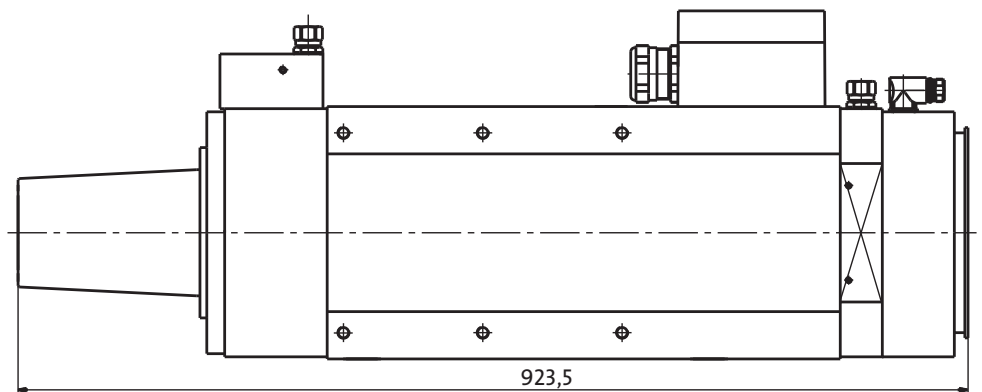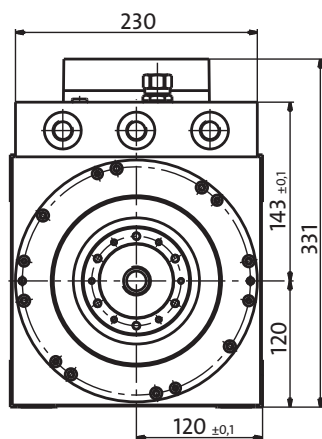

Specifications are subject to change without notice.