

Spindle ball bearing HY S 61802 C TA P4+

08.05.2024



Components


Bearing designation:	HY S 61802 C TA
Bearing design:	S
Series / size:	61802
Ball material:	Ceramic
Cage:	TA
Precision:	P4+
Main dimensions [d x D x B]:	15 x 24 x 5 mm

Load data

Static load capacity	C_{0r} : 1120 N
Dynamic load capacity	C_r : 1900 N
Fatigue load limit	C_U : 42 N
Speed limit	n_{grease} : 82500 1/min
Speed limit	n_{oil} : 110000 1/min
Light preload	L: 10 N
Axial rigidity	C_{ax} : 14 N/ μ m
Medium preload	M: 30 N
Axial rigidity	C_{ax} : 23 N/ μ m
Heavy preload	S: 60 N
Axial rigidity	C_{ax} : 31 N/ μ m
Spring preload	Ff: 45 N (for n_{max})

Geometrical Data

Bore diameter	d: 15 mm	Oiling nozzle position	d_T : 18.6 mm
Outer diameter	D: 24 mm	Pitch circle diameter	d_m : 19.5 mm
Width of single bearing	B: 5 mm	Inner diameter of outer ring	D_1 : 21.2 mm
Ball diameter	D_w : 2.381 mm	Undercut of associated component	$r_{a \max}$: 0.3 mm
Number of balls	Z: 17	Undercut of associated component (open side)	$r_{b \max}$: 0.2 mm
Chamfer (min)	$r_{1,2 \min}$: 0.3 mm	Abutment diameter inner ring	$d_{a,b \min}$: 16.5 mm
Chamfer (min), open side	$r_{3,4 \min}$: 0.2 mm	Abutment diameter outer ring	$D_{a,b \max}$: 22.6 mm
Outer diameter of inner ring	d_1 : 17.8 mm	Inner diameter of outer ring (open side)	D_2 : 21.9 mm
Outer diameter of inner ring (open side)	d_2 : -	Bearing weight	m: 0.006 kg
		Contact angle	Alpha 0: 15°

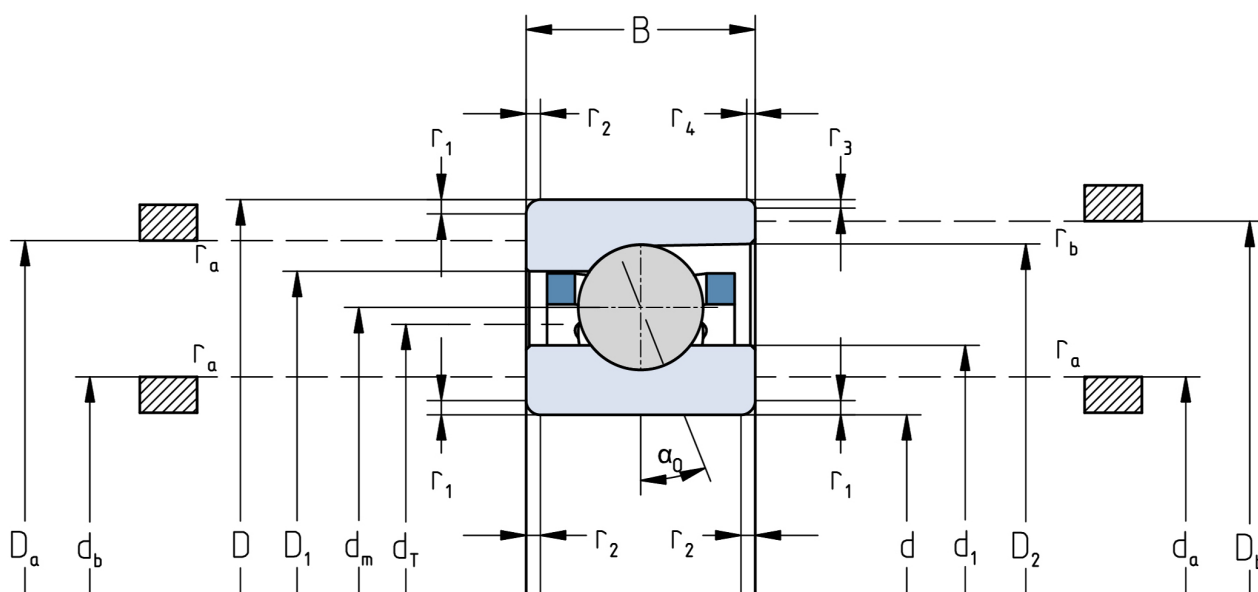

The given speed limits apply to individual bearings with spring preload. Correction factors must be considered for all properties which deviate from this.