


Spindle ball bearing HY KH 6003 C TA P4+

08.05.2024



Components


Bearing designation:	HY KH 6003 C TA
Bearing design:	KH
Series / size:	6003
Ball material:	Ceramic
Cage:	TA
Seal:	2RZ optional (with grease)
Precision:	P4+
Main dimensions [d x D x B]:	17 x 35 x 10 mm

Load data

Static load capacity	C_{0r} : 1690 N
Dynamic load capacity	C_r : 3750 N
Fatigue load limit	C_U : 64 N
Speed limit	n_{grease} : 78750 1/min
Speed limit	n_{oil} : 105000 1/min
Light preload	L: 19 N
Axial rigidity	C_{ax} : 22 N/ μ m
Medium preload	M: 55 N
Axial rigidity	C_{ax} : 34 N/ μ m
Heavy preload	S: 110 N
Axial rigidity	C_{ax} : 45 N/ μ m
Spring preload	Ff: 80 N (for n_{max})

Geometrical Data

Bore diameter	d: 17 mm	Oiling nozzle position	d_T : 24.2 mm
Outer diameter	D: 35 mm	Pitch circle diameter	d_m : 25.6 mm
Width of single bearing	B: 10 mm	Inner diameter of outer ring	D_1 : 28.4 mm
Ball diameter	D_w : 3.969 mm	Undercut of associated component	$r_{a \max}$: 0.3 mm
Number of balls	Z: 15	Undercut of associated component (open side)	$r_{b \max}$: 0.3 mm
Chamfer (min)	$r_{1,2 \min}$: 0.3 mm	Abutment diameter inner ring	$d_{a,b \min}$: 19.2 mm
Chamfer (min), open side	$r_{3,4 \min}$: 0.3 mm	Abutment diameter outer ring	$D_{a,b \max}$: 33.4 mm
Outer diameter of inner ring	d_1 : 22.7 mm	Inner diameter of outer ring (open side)	D_2 : 29.6 mm
Outer diameter of inner ring (open side)	d_2 : 22 mm	Bearing weight	m: 0.037 kg
		Contact angle	Alpha 0: 17°

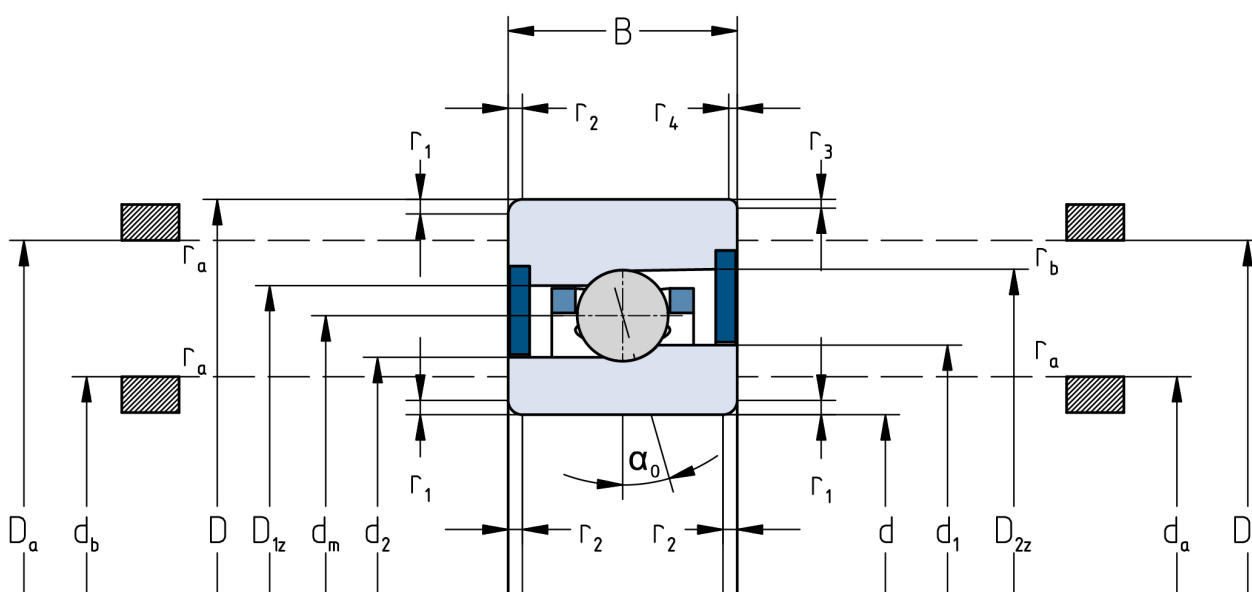

The given speed limits apply to individual bearings with spring preload. Correction factors must be considered for all properties which deviate from this.