


Spindle ball bearing HY KH 61908 E TA P4+

08.05.2024



Components


Bearing designation:	HY KH 61908 E TA
Bearing design:	KH
Series / size:	61908
Ball material:	Ceramic
Cage:	TA
Seal:	2RZ optional (with grease)
Precision:	P4+
Main dimensions [d x D x B]:	40 x 62 x 12 mm

Load data

Static load capacity	C_{0r} : 4150 N
Dynamic load capacity	C_r : 6550 N
Fatigue load limit	C_U : 158 N
Speed limit	n_{grease} : 36000 1/min
Speed limit	n_{oil} : 48000 1/min
Light preload	L: 55 N
Axial rigidity	C_{ax} : 86 N/ μ m
Medium preload	M: 160 N
Axial rigidity	C_{ax} : 125 N/ μ m
Heavy preload	S: 330 N
Axial rigidity	C_{ax} : 163 N/ μ m
Spring preload	Ff: 300 N (for n_{max})

Geometrical Data

Bore diameter	d: 40 mm	Oiling nozzle position	d_T : 48.3 mm
Outer diameter	D: 62 mm	Pitch circle diameter	d_m : 49.7 mm
Width of single bearing	B: 12 mm	Inner diameter of outer ring	D_1 : 53.1 mm
Ball diameter	D_w : 4.762 mm	Undercut of associated component	$r_{a \max}$: 0.6 mm
Number of balls	Z: 25	Undercut of associated component (open side)	$r_{b \max}$: 0.3 mm
Chamfer (min)	$r_{1,2 \min}$: 0.6 mm	Abutment diameter inner ring	$d_{a,b \min}$: 43.1 mm
Chamfer (min), open side	$r_{3,4 \min}$: 0.3 mm	Abutment diameter outer ring	$D_{a,b \max}$: 59.3 mm
Outer diameter of inner ring	d_1 : 46.8 mm	Inner diameter of outer ring (open side)	D_2 : 54.6 mm
Outer diameter of inner ring (open side)	d_2 : 45.3 mm	Bearing weight	m: 0.11 kg
		Contact angle	Alpha 0: 25°

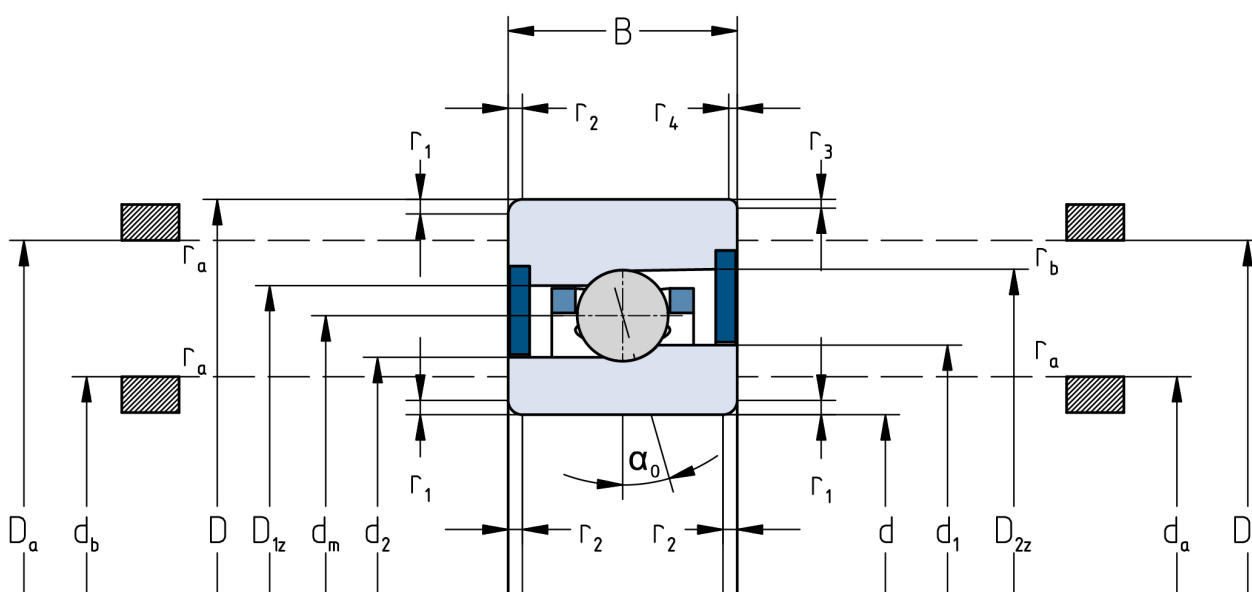

The given speed limits apply to individual bearings with spring preload. Correction factors must be considered for all properties which deviate from this.