

Spindle ball bearing KH 6011 E TA P4+

08.05.2024



Components


Bearing designation:	KH 6011 E TA
Bearing design:	KH
Series / size:	6011
Ball material:	Steel 100Cr6
Cage:	TA
Seal:	2RZ optional (with grease)
Precision:	P4+
Main dimensions [d x D x B]:	55 x 90 x 18 mm

Load data

Static load capacity	C_{0r} : 10900 N
Dynamic load capacity	C_r : 15900 N
Fatigue load limit	C_U : 568 N
Speed limit	n_{grease} : 19875 1/min
Speed limit	n_{oil} : 26500 1/min
Light preload	L: 130 N
Axial rigidity	C_{ax} : 115 N/ μ m
Medium preload	M: 400 N
Axial rigidity	C_{ax} : 172 N/ μ m
Heavy preload	S: 800 N
Axial rigidity	C_{ax} : 223 N/ μ m
Spring preload	Ff: 1080 N (for n_{max})

Geometrical Data

Bore diameter	d:	55 mm	Oiling nozzle position	d _r :	69.3 mm
Outer diameter	D:	90 mm	Pitch circle diameter	d _m :	71.5 mm
Width of single bearing	B:	18 mm	Inner diameter of outer ring	D ₁ :	76.5 mm
Ball diameter	D _w :	7.938 mm	Undercut of associated component	r _{a max} :	1 mm
Number of balls	Z:	23	Undercut of associated component (open side)	r _{b max} :	1 mm
Chamfer (min)	r _{1,2 min} :	1.1 mm	Abutment diameter inner ring	d _{a,b min} :	60.8 mm
Chamfer (min), open side	r _{3,4 min} :	1 mm	Abutment diameter outer ring	D _{a,b max} :	85 mm
Outer diameter of inner ring	d ₁ :	66.8 mm	Inner diameter of outer ring (open side)	D ₂ :	79.6 mm
Outer diameter of inner ring (open side)	d ₂ :	65.6 mm	Bearing weight	m:	0.4 kg
			Contact angle	Alpha 0:	25°

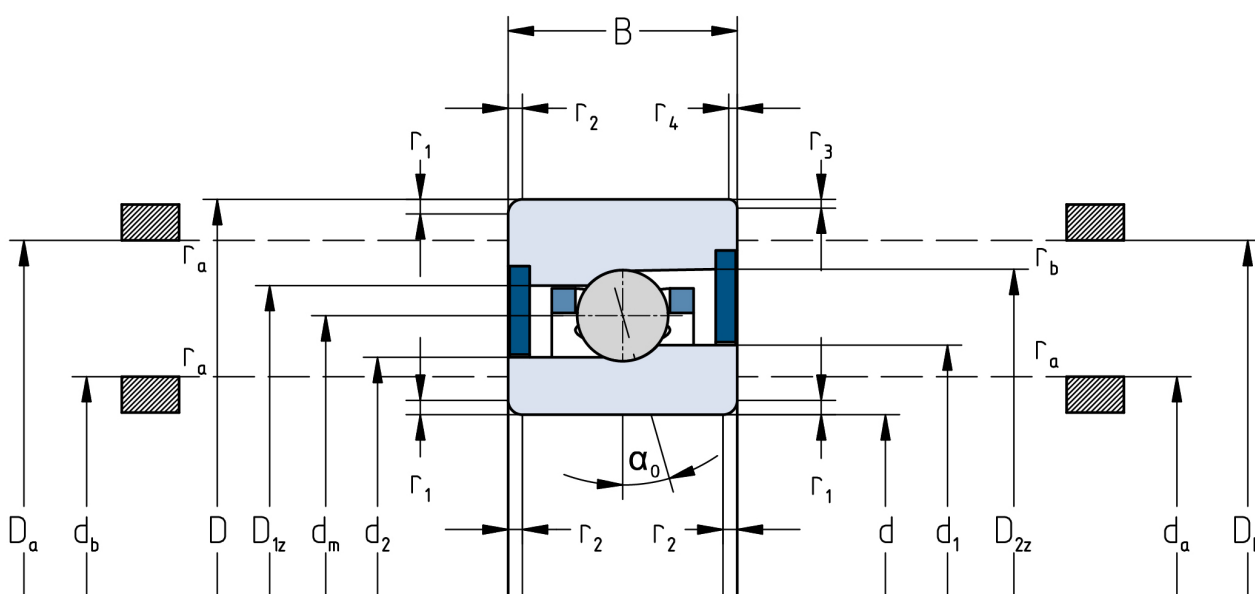

The given speed limits apply to individual bearings with spring preload. Correction factors must be considered for all properties which deviate from this.