


# Spindle ball bearing KH 6012 E TA P4+

08.05.2024



## Components


|                              |                            |
|------------------------------|----------------------------|
| Bearing designation:         | KH 6012 E TA               |
| Bearing design:              | KH                         |
| Series / size:               | 6012                       |
| Ball material:               | Steel 100Cr6               |
| Cage:                        | TA                         |
| Seal:                        | 2RZ optional (with grease) |
| Precision:                   | P4+                        |
| Main dimensions [d x D x B]: | 60 x 95 x 18 mm            |

## Load data

|                       |                             |
|-----------------------|-----------------------------|
| Static load capacity  | $C_{0r}$ : 11500 N          |
| Dynamic load capacity | $C_r$ : 16200 N             |
| Fatigue load limit    | $C_U$ : 597 N               |
| Speed limit           | $n_{grease}$ : 18750 1/min  |
| Speed limit           | $n_{oil}$ : 25000 1/min     |
| Light preload         | L: 140 N                    |
| Axial rigidity        | $C_{ax}$ : 122 N/μm         |
| Medium preload        | M: 400 N                    |
| Axial rigidity        | $C_{ax}$ : 177 N/μm         |
| Heavy preload         | S: 800 N                    |
| Axial rigidity        | $C_{ax}$ : 229 N/μm         |
| Spring preload        | Ff: 1130 N (for $n_{max}$ ) |

## Geometrical Data

|                                          |                         |                                              |                          |
|------------------------------------------|-------------------------|----------------------------------------------|--------------------------|
| Bore diameter                            | d: 60 mm                | Oiling nozzle position                       | $d_T$ : 74.4 mm          |
| Outer diameter                           | D: 95 mm                | Pitch circle diameter                        | $d_m$ : 76.5 mm          |
| Width of single bearing                  | B: 18 mm                | Inner diameter of outer ring                 | $D_1$ : 81.5 mm          |
| Ball diameter                            | $D_w$ : 7.938 mm        | Undercut of associated component             | $r_{a \max}$ : 1 mm      |
| Number of balls                          | Z: 24                   | Undercut of associated component (open side) | $r_{b \max}$ : 1 mm      |
| Chamfer (min)                            | $r_{1,2 \min}$ : 1.1 mm | Abutment diameter inner ring                 | $d_{a,b \min}$ : 65.7 mm |
| Chamfer (min), open side                 | $r_{3,4 \min}$ : 1 mm   | Abutment diameter outer ring                 | $D_{a,b \max}$ : 90.1 mm |
| Outer diameter of inner ring             | $d_1$ : 71.9 mm         | Inner diameter of outer ring (open side)     | $D_2$ : 84.6 mm          |
| Outer diameter of inner ring (open side) | $d_2$ : 70.7 mm         | Bearing weight                               | m: 0.43 kg               |
|                                          |                         | Contact angle                                | Alpha 0: 25°             |

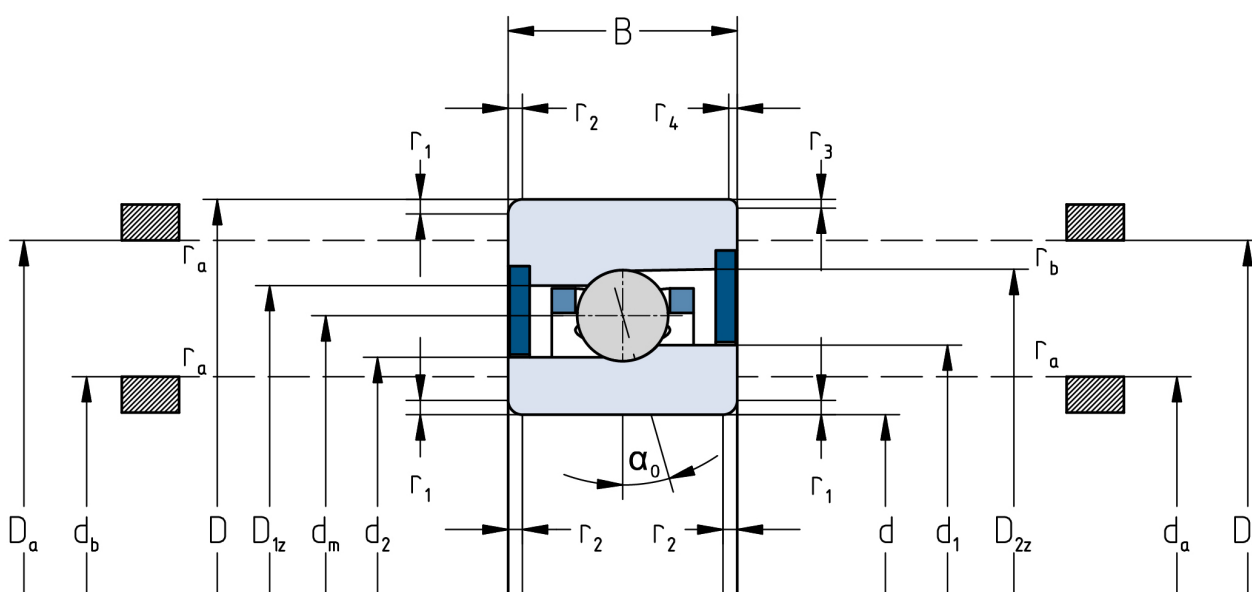

The given speed limits apply to individual bearings with spring preload. Correction factors must be considered for all properties which deviate from this.