

# Spindle ball bearing S 6021 C TA P4+

08.05.2024



## Components


|                              |                   |
|------------------------------|-------------------|
| Bearing designation:         | S 6021 C TA       |
| Bearing design:              | S                 |
| Series / size:               | 6021              |
| Ball material:               | Steel 100Cr6      |
| Cage:                        | TA                |
| Seal:                        | 2RZ upon request  |
| Precision:                   | P4+               |
| Main dimensions [d x D x B]: | 105 x 160 x 26 mm |

## Load data

|                       |                             |
|-----------------------|-----------------------------|
| Static load capacity  | $C_{0r}$ : 93000 N          |
| Dynamic load capacity | $C_r$ : 86000 N             |
| Fatigue load limit    | $C_U$ : 4188 N              |
| Speed limit           | $n_{grease}$ : 9750 1/min   |
| Speed limit           | $n_{oil}$ : 13000 1/min     |
| Light preload         | L: 440 N                    |
| Axial rigidity        | $C_{ax}$ : 124 N/μm         |
| Medium preload        | M: 1310 N                   |
| Axial rigidity        | $C_{ax}$ : 202 N/μm         |
| Heavy preload         | S: 2610 N                   |
| Axial rigidity        | $C_{ax}$ : 284 N/μm         |
| Spring preload        | Ff: 4560 N (for $n_{max}$ ) |

## Geometrical Data

|                                          |                       |                                              |                           |
|------------------------------------------|-----------------------|----------------------------------------------|---------------------------|
| Bore diameter                            | d: 105 mm             | Oiling nozzle position                       | $d_f$ : 127.9 mm          |
| Outer diameter                           | D: 160 mm             | Pitch circle diameter                        | $d_m$ : 132.5 mm          |
| Width of single bearing                  | B: 26 mm              | Inner diameter of outer ring                 | $D_1$ : 142.2 mm          |
| Ball diameter                            | $D_w$ : 15.875 mm     | Undercut of associated component             | $r_{a \max}$ : 2 mm       |
| Number of balls                          | Z: 22                 | Undercut of associated component (open side) | $r_{b \max}$ : 1 mm       |
| Chamfer (min)                            | $r_{1,2 \min}$ : 2 mm | Abutment diameter inner ring                 | $d_{a,b \min}$ : 115.8 mm |
| Chamfer (min), open side                 | $r_{3,4 \min}$ : 1 mm | Abutment diameter outer ring                 | $D_{a,b \max}$ : 150.6 mm |
| Outer diameter of inner ring             | $d_1$ : 122.8 mm      | Inner diameter of outer ring (open side)     | $D_2$ : 148.6 mm          |
| Outer diameter of inner ring (open side) | $d_2$ : -             | Bearing weight                               | m: 1.6 kg                 |
|                                          |                       | Contact angle                                | Alpha 0: 15°              |

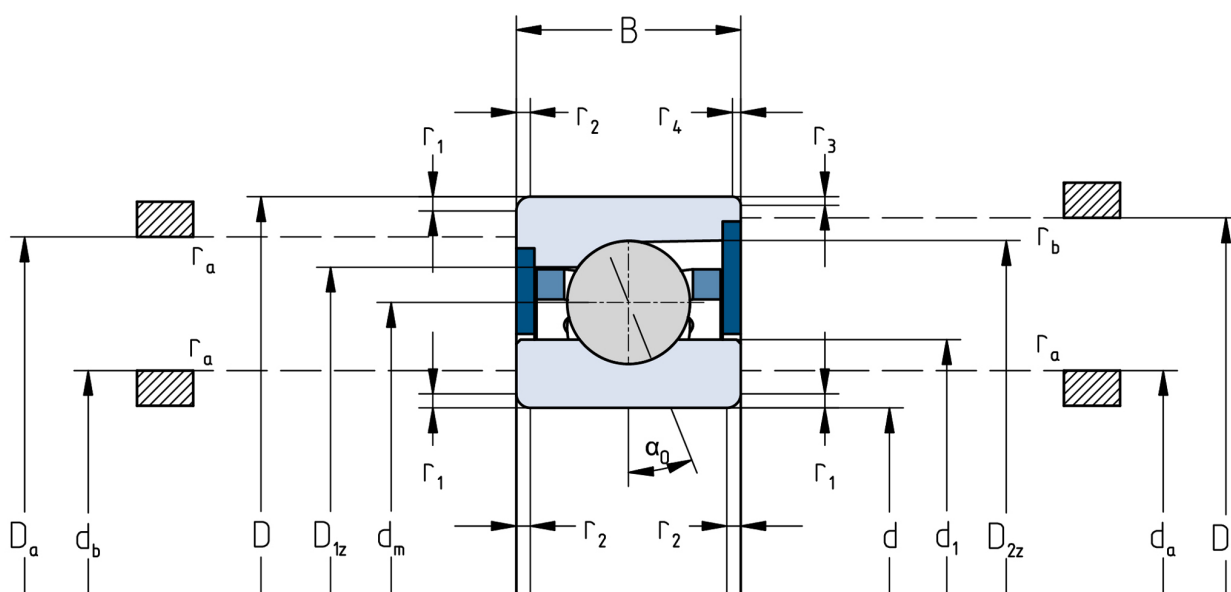

The given speed limits apply to individual bearings with spring preload. Correction factors must be considered for all properties which deviate from this.