


TSI 100 x 250



Technical data

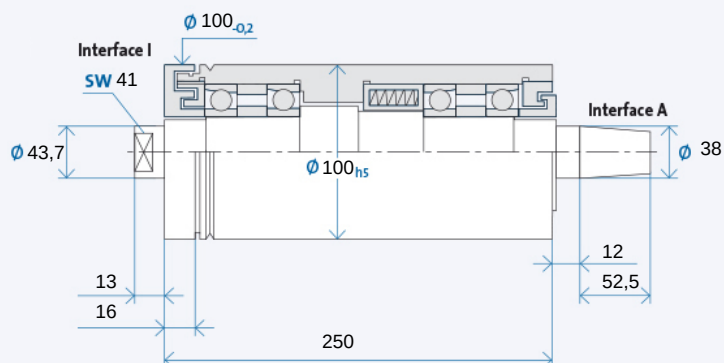


Maximum speed $n_{\max}$ [min⁻¹]* for bearing types:

Steel (steel)	15000
Hybrid (optional)	20000


* without tool

Ordering information: TSI 100 x 250 R is for clockwise, L for counter-clockwise

ROTATION (CW.)




ROTATION (CCW.)




Accessories

Pulleys



TSI Grinding quill – semifinished



Ordering information semifinished: I X₁
X₁: Interface 10/14/...

Interface	Dimensions [mm]		
	D	C	T
A 38	50	80	60
	63	80	60
	160	80	60


Ordering information pulley: AX₁-X₂

X₁: Interface: 10/13/...

X₂: Figure from column D


Puller for pulley: AX₁/...

Tool interface



Tool interface: taper 1 : 7,5
nominal value, included angle acc.
to GMN precision standards

Pulley interface



Pulley interface: taper 1 : 7,5
nominal value, included angle acc.
to GMN precision standards