


TSP 100 x 315



Technical data

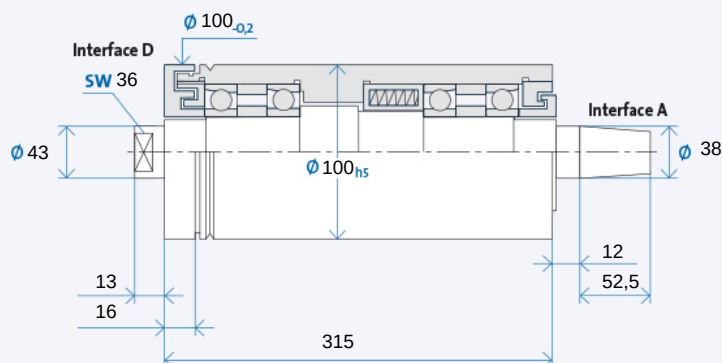


Maximum speed $n_{\max}$ [min⁻¹]* for bearing types:

Steel (steel)	15000
Hybrid (optional)	20000


* without tool

Ordering information: TSP 100 x 315 R is for clockwise, L for counter-clockwise


ROTATION (CW.)



ROTATION (CCW.)




Tool interface



Tool interface: fitting bores with flat contact face acc. to GMN precision standards


Pulley interface




Pulley interface: taper 1 : 7,5 nominal value, included angle acc. to GMN precision standards

Accessories

Pulleys



TSP Grinding quill – semifinished



Ordering information semifinished: DX₁/X₂
X₁/X₂ : Interface 08/14/...

Interface	Dimensions [mm]		
	D	C	T
A 38	50	80	60
	63	80	60
	160	80	60

Ordering information pulley: AX₁-X₂

X₁: Interface: 10/13/...

X₂: Figure from column D

Puller for pulley: AX₁/...