Spindle ball bearing S 6002 E TA P4+

24.11.2026



Components

Bearing designation:	S 6002 E TA
Bearing design:	S
Series / size:	6002
Ball material:	Steel 100Cr6
Cage:	TA
Precision:	P4+ (UP+ Upon request)
Main dimensions [d x D x B]:	15 x 32 x 9 mm

Load data

Static load capacity	C_{0r}:	3650 N
Dynamic load capacity	C_r:	6350 N
Fatigue load limit	C_U:	188 N
Speed limit	n_{grease}:	46500 1/min
Speed limit	n_{oil}:	62000 1/min
Light preload	L:	55 N
Axial rigidity	C_{ax}:	56 N/µm
Medium preload	M:	160 N
Axial rigidity	C_{ax}:	84 N/µm
Heavy preload	S:	320 N
Axial rigidity	C_{ax}:	112 N/µm
Spring preload	Ff:	360 N (for n_{max})

Geometrical Data

Bore diameter	d:	15 mm
Outer diameter	D:	32 mm
Width of single bearing	B:	9 mm
Ball diameter	D_w:	4.762 mm
Number of balls	Z:	13
Chamfer (min)	$r_{1,2\ min}$:	0.3 mm
Chamfer (min), open side	$r_{3,4\ min}$:	0.3 mm
Outer diameter of inner ring	d_1:	20.2 mm
Outer diameter of inner ring (open side)	d_2:	-
Oiling nozzle position	d_T:	21.9 mm
Pitch circle diameter	d_m:	23.5 mm
Inner diameter of outer ring	D_1:	26.9 mm
Undercut of associated component	$r_{a\ max}$:	0.3 mm
Undercut of associated component (open side)	$r_{b\ max}$:	0.3 mm
Abutment diameter inner ring	$d_{a,b\ min}$:	17.6 mm
Abutment diameter outer ring	$D_{a,b\ max}$:	30.2 mm
Inner diameter of outer ring (open side)	D_2:	28.4 mm
Bearing weight	m:	0.029 kg
Contact angle	Alpha 0:	25°

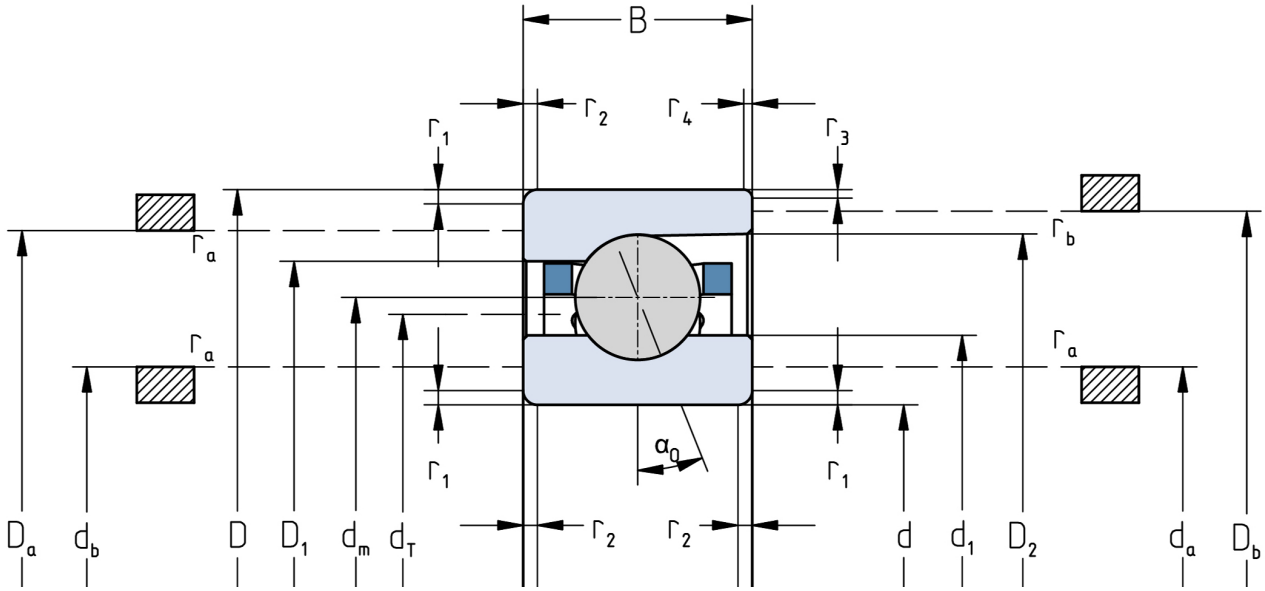

The given speed limits apply to individual bearings with spring preload. Correction factors must be considered for all properties which deviate from this.