
# TSP 100 x 355






## Technical data

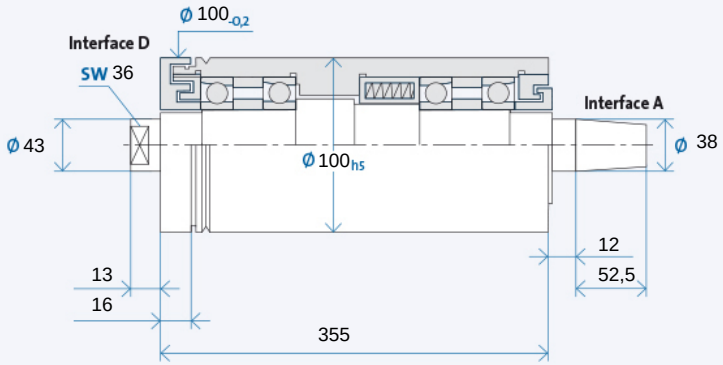



| Maximum speed $n_{max}$ [min-1]* for bearing types: | |
|---|---|
| Steel (steel) | 15000 |
| Hybrid (optional) | 20000 |

* without tool

Ordering information: TSP 100 x 355 R is for clockwise, L for counter-clockwise


| ROTATION (CW.) | ROTATION (CCW.) |
|---|---|
|  |  |

## Tool interface

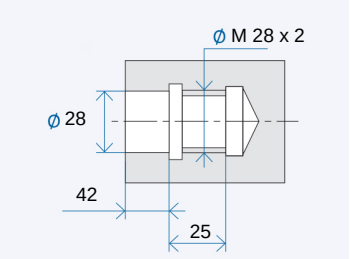


Tool interface: fitting bores with flat contact face acc. to GMN precision standards


## Pulley interface




Pulley interface: taper 1 : 7,5 nominal value, included angle acc. to GMN precision standards

# Accessories


## Pulleys

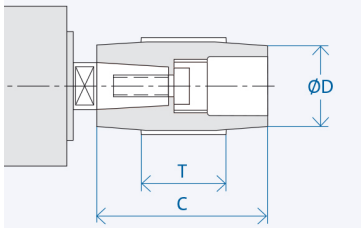


| Interface | Dimensions [mm] | | |
|---|---|---|---|
| | D | C | T |
| A 38 | 50 | 80 | 60 |
| | 63 | 80 | 60 |
| | 160 | 80 | 60 |

Ordering information pulley: A$X_1$-$X_2$
$X_1$: Interface: 10/13/...
$X_2$: Figure from column D
Puller for pulley: A$X_1$/...

## TSP Grinding quill – semifinished




Ordering information semifinished: D$X_1$/$X_2$
$X_1$/$X_2$ : Interface 08/14/...

This data sheet reflects the state of information at the time of printing. Subject to technical changes. Information on possible options can be obtained from our catalogue which can be downloaded at www.gmn.de