


Freewheel Clutch Insert Element FR 473 Z

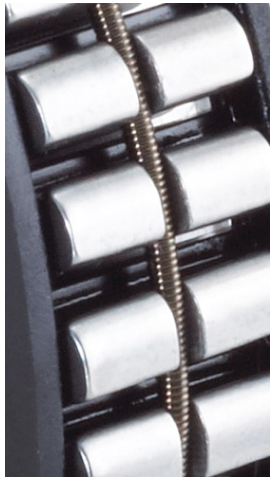

Item number 300613

Components

Freewheel clutch

- Rings
- Inner ring
- Outer ring

Insert Element FE 400 Z

Bearing steel, hardened and ground
Press fit
Press fit

Key values

| | |
|------------------------|------------|
| Ø Shaft d: | 60 mm |
| Ø Hub D: | 78 mm |
| Installed width W: | 12 mm |
| Torque T_{nom} : | 496 Nm |
| Number of sprags: | 71 |
| Speed n_{max} : | 2500 rpm |
| Weight: | 0.1373 kg |
| Operating temperature: | max. 140°C |

Lubrication

Oil or grease lubrication

Delivered with corrosion protection.

Operative grease filling on request.

Installation

Installation tolerances

Shaft h5; hub H6

Constraints

The freewheel clutch insert element requires axial constraints on both sides.

Mating parts

Hardening and grinding of the mating parts is not necessary. Thoroughly clean (grease free) the mating parts in the vicinity of the freewheel clutch as well as the freewheel clutch's rings before making the press fit.

Bearing

Freewheel clutch insert elements are not self-centering. External bearing support to define the gap between mating parts (Shaft and housing) is necessary.

