

Labyrinth plastic seal Type SA



SA 68 X 95 X 12

Item number 301918

Technical data

Material:	High-quality polyoxymethylene (POM)
Inner diameter ID:	68 mm
Outer diameter OD:	95 mm
Installed width W:	12 mm
Sealing gap:	Conical
Axial play S_{ax}^* :	0.8 mm
Gap diameter e_1 :	72 mm
Gap diameter e_2 :	87 mm
Speed limit:	15840 rpm
Weight:	0.0459 kg
Operating temperature t:	-40° - 60°C

*Entire movability from one end position to the other

Heavy and direct splashing liquids could be drained through an additional groove in the outer ring – for rotating shafts only.

Installation

"l" Length (chamfering of shaft and housing) depending on the width W: $l = 0,1 \times B$




Component tolerances

Surrounding structure (mating parts)

Housing: H7 / Shaft: h7

Surface quality: $R_z \leq 16 \mu\text{m}$; $R_a \leq 3,2 \mu\text{m}$

Axial play:

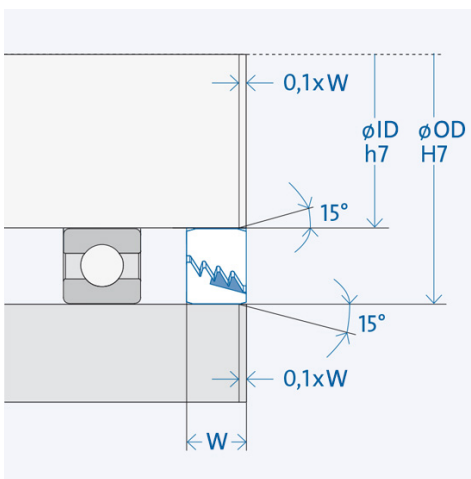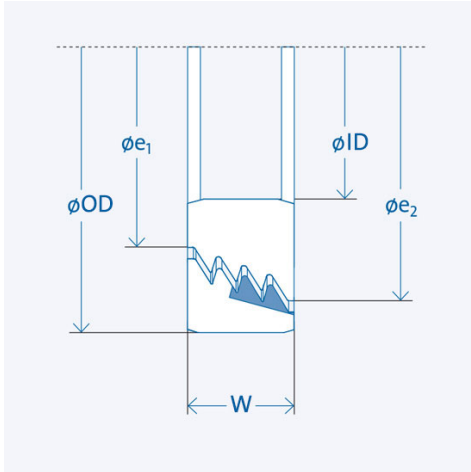

The larger gap diameter e_2 must always face the impact.

The groove in the stationary part must be positioned at the lowest point.