

# Spindle ball bearing HY S 61913 C TA P4+

08.05.2024



## Components


|                              |                  |
|------------------------------|------------------|
| Bearing designation:         | HY S 61913 C TA  |
| Bearing design:              | S                |
| Series / size:               | 61913            |
| Ball material:               | Ceramic          |
| Cage:                        | TA               |
| Seal:                        | 2RZ upon request |
| Precision:                   | P4+              |
| Main dimensions [d x D x B]: | 65 x 90 x 13 mm  |

## Load data

|                       |                            |
|-----------------------|----------------------------|
| Static load capacity  | $C_{0r}$ : 19300 N         |
| Dynamic load capacity | $C_r$ : 19500 N            |
| Fatigue load limit    | $C_U$ : 730 N              |
| Speed limit           | $n_{grease}$ : 20625 1/min |
| Speed limit           | $n_{oil}$ : 27500 1/min    |
| Light preload         | L: 100 N                   |
| Axial rigidity        | $C_{ax}$ : 65 N/ $\mu$ m   |
| Medium preload        | M: 300 N                   |
| Axial rigidity        | $C_{ax}$ : 104 N/ $\mu$ m  |
| Heavy preload         | S: 600 N                   |
| Axial rigidity        | $C_{ax}$ : 145 N/ $\mu$ m  |
| Spring preload        | Ff: 800 N (for $n_{max}$ ) |

## Geometrical Data

|                                          |                         |                                              |                          |
|------------------------------------------|-------------------------|----------------------------------------------|--------------------------|
| Bore diameter                            | d: 65 mm                | Oiling nozzle position                       | $d_T$ : 75.4 mm          |
| Outer diameter                           | D: 90 mm                | Pitch circle diameter                        | $d_m$ : 77.5 mm          |
| Width of single bearing                  | B: 13 mm                | Inner diameter of outer ring                 | $D_1$ : 81.9 mm          |
| Ball diameter                            | $D_w$ : 7.144 mm        | Undercut of associated component             | $r_{a \max}$ : 1 mm      |
| Number of balls                          | Z: 24                   | Undercut of associated component (open side) | $r_{b \max}$ : 0.3 mm    |
| Chamfer (min)                            | $r_{1,2 \min}$ : 1 mm   | Abutment diameter inner ring                 | $d_{a,b \min}$ : 69.9 mm |
| Chamfer (min), open side                 | $r_{3,4 \min}$ : 0.3 mm | Abutment diameter outer ring                 | $D_{a,b \max}$ : 85.5 mm |
| Outer diameter of inner ring             | $d_1$ : 73.1 mm         | Inner diameter of outer ring (open side)     | $D_2$ : 84.7 mm          |
| Outer diameter of inner ring (open side) | $d_2$ : -               | Bearing weight                               | m: 0.18 kg               |
|                                          |                         | Contact angle                                | Alpha 0: 15°             |

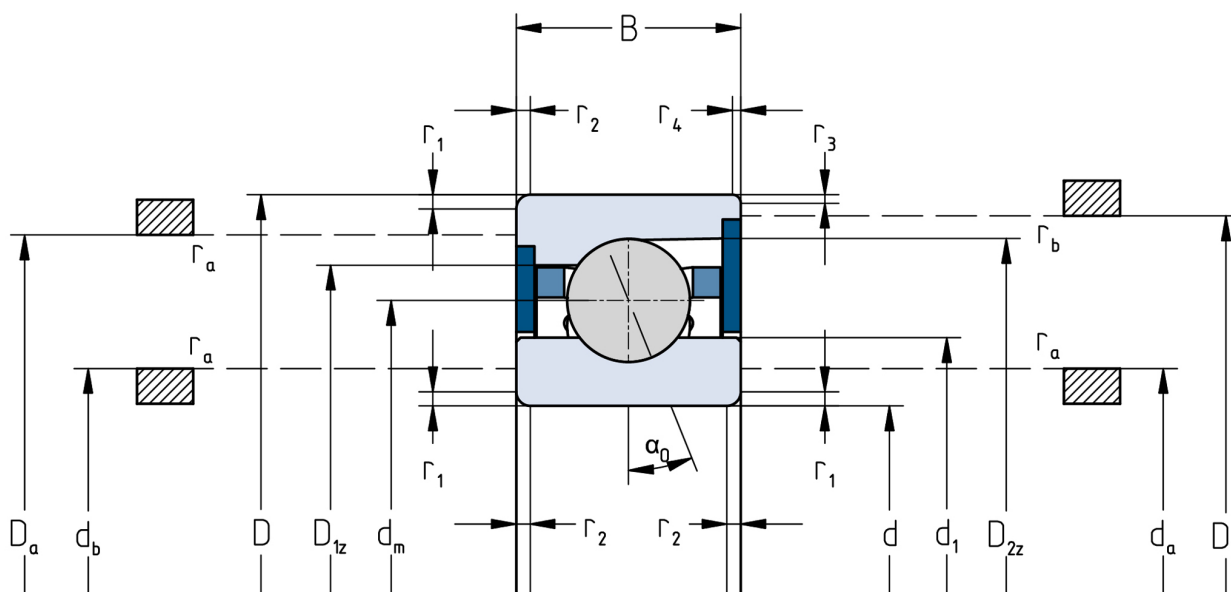

The given speed limits apply to individual bearings with spring preload. Correction factors must be considered for all properties which deviate from this.